


# Introducing ecoFITTOM® the world's first PVC-O pressure fittings for use in Rural and Civil pressurised water reticulation networks

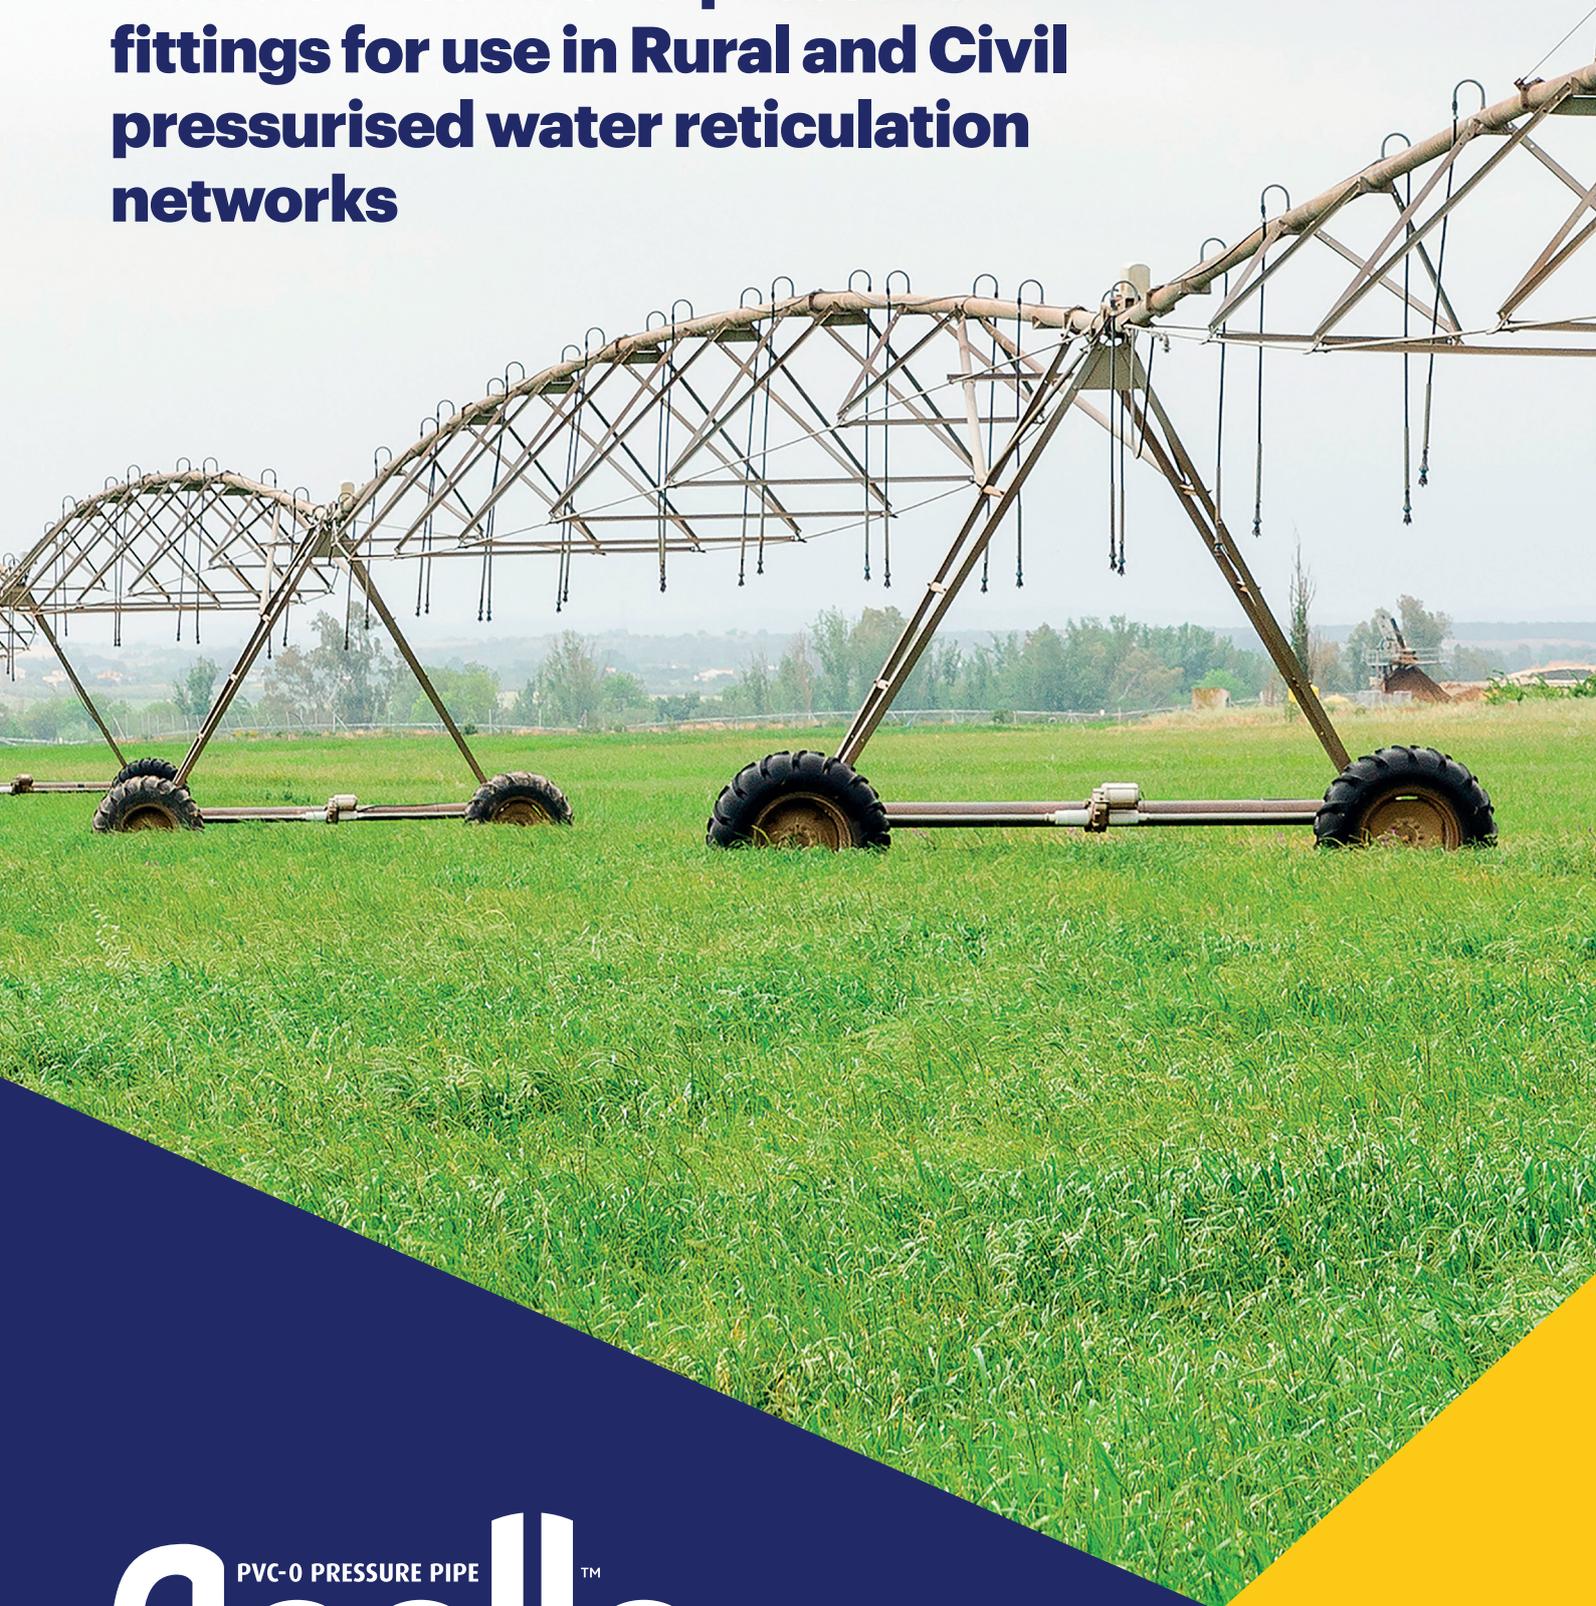

PVC-O PRESSURE PIPE <sup>TM</sup>

# Apollo

PVC-O PRESSURE FITTINGS

**iPLEX**  
*Pipelines*

# PVC-O Pressure Fittings



## Strength

Molecular orientation offers improved mechanical properties and higher impact strength, compared with Iplex PVC-U pressure fittings

## Lighter Weight

- Manual handling up to DN375
- **Significantly lighter** weight than the Ductile Iron equivalent fittings

## Performance

- 16-bar pressure rated (PN16)
- Corrosion resistant PVC-O material
- Single material pipe system - compatible with Iplex Series 1 PVC-O, PVC-M and PVC-U pressure pipe

## Retained Joint Seals

- Factory-fitted "retained" seal, rubber ring joint system

## Compliance

Applied for compliance to prEN 17176 Part 3 Piping Systems For Water Supply And For Buried And Above Ground Drainage, Sewerage And Irrigation Under Pressure - Orientated Unplasticized Poly (Vinyl Chloride) (PVC-O)



**Significantly lighter**  
than the Ductile  
Iron equivalent  
fittings



## Ranging

**Diameters** - Series 1 DN150, DN175, DN225, DN300 and DN375

## Product Range

Product Code	Size (mm)	Product
8801.150.22	150	 <b>22.5° Bend</b>
8801.175.22	175	
8801.225.22	225	
8801.300.22	300	
8801.375.22	375	
8801.150.45	150	 <b>45° Bend</b>
8801.175.45	175	
8801.225.45	225	
8801.300.45	300	
8801.375.45	375	
8810.150	150	 <b>Coupling</b>
8810.175	175	
8810.225	225	
8810.300	300	
8810.375	375	
8811.150	150	 <b>Slip/Repair Coupling</b>
8811.175	175	
8811.225	225	
8811.300	300	
8811.375	375	
8823.175.150	175 x 150	 <b>Reducing Socket</b>
8823.225.175	225 x 175	
8823.300.225	300 x 225	
8823.375.225	375 x 225	
8823.375.300	375 x 300	